

MOEN® 摩恩®

壁挂式小便器

安装说明书

Wall Mount Urinal

INSTALLATION INSTRUCTIONS

如需安装支持、配件替换，或遇配件丢失等情况，请联系本公司。

对于中国大陆以外的市场，请咨询当地经销商。

(中国大陆) 400-630-8866

(中国大陆) www.moen.cn

(中国大陆以外) www.moen.com.hk

For installation support, replacement parts, or missing items, please contact us.

For consumers in markets outside the Chinese mainland, please consult the local dealer.

(Chinese Mainland) 400-630-8866

(Chinese Mainland) www.moen.cn




(Outside Chinese Mainland) www.moen.com.hk

推荐工具

为了安全和让安装和替换变得容易，本公司建议您使用以下工具：

HELPFUL TOOLS

For safety and ease of installation and replacement, the company recommends the use of the following tools:



图片仅供参考
(款式因型号而异)

Image is for reference only
(Style varies by model)


记录购买的型号：

(保存安装说明书以备将来参考)

Record Purchased Model Number:
(Save instruction sheet for future reference)

墙排式小便器示意图

挂钩 E
Hook up



*Children's urinal installed at a height of 400-470mm above the ground

排污管道的设置应符合国家建筑给排水设计标准，否则有影响产品使用的可能。

The installation of sewage pipes should comply with the national building water supply and drainage design standards, otherwise it may affect the use of the product.

地排式小便器示意图

挂钩 E
Hook up



*Children's urinal installed at a height of 400-470mm above the ground

排污管道的设置应符合国家建筑给排水设计标准，否则有影响产品使用的可能。

The installation of sewage pipes should comply with the national building water supply and drainage design standards, otherwise it may affect the use of the product.

完工墙面



Reserved height of sewage pipe

注意：排污管外径为50mm；建议管凸出墙面约10mm，后期可根据产品实际情况修整。


Note: The outer diameter of the sewage pipe is 50mm; It is recommended that the pipe protrude from the wall by about 10mm, and you can adjust the it according to the actual situation.

预订:




10~13mm

Confirm that the location and specifications of the ground drain hole meet the urinal installation requirements.

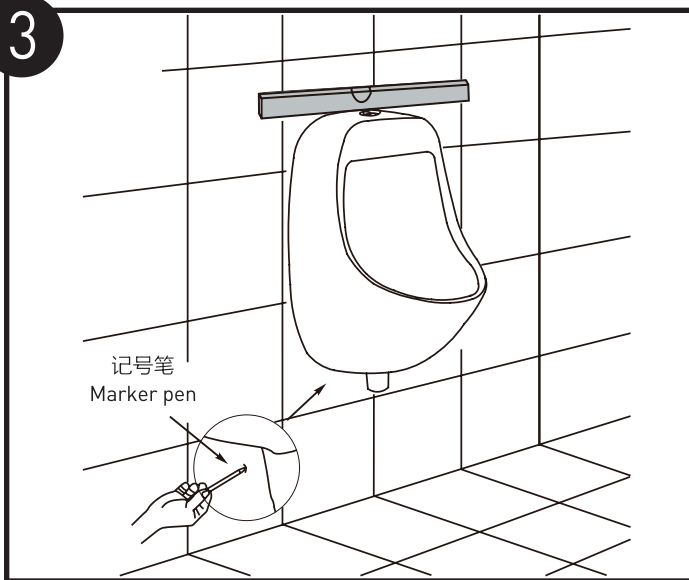

将小便器预装在需要安装的位置，用水平尺矫正水平位置，再用记号笔做好标记。

Pre-install the urinal in the position where it needs to be installed, correct the horizontal position with a spirit level, and then mark it with a marker.

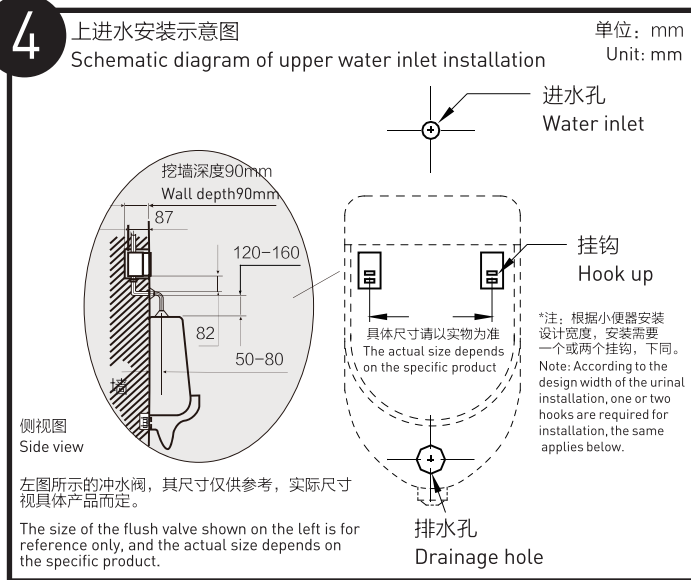


移走小便器，根据安装膨胀螺栓的位置计算出挂钩的安装位置，记号笔标识后，用冲击钻钻孔后塞入膨胀管并卡紧。

警告：钻孔前请确认对应墙体内没有埋设管路或电线。

Remove the urinal, calculate the installation position of the hook up according to the position where the expansion bolt is installed. After marking with a marker, drill the hole and then insert it into the expansion tube and clamp it tightly.

Warning: Before drilling, make sure that there is no pipeline or cable buried in the wall that needs to be punched.

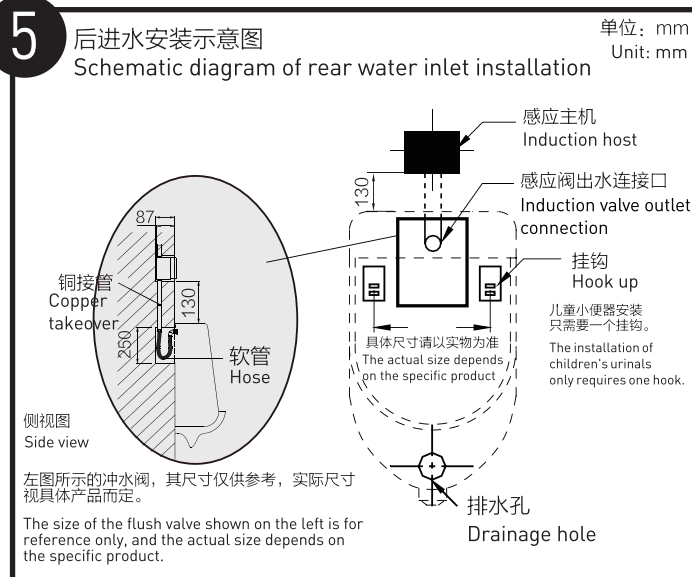


将挂块安装在墙上，排污孔两端的孔敲入膨胀螺栓。

警告：钻孔前请确认对应墙体内没有埋设管路或电线。


Install the hanging block on the wall, and tap the expansion bolts into the holes at both ends of the drain hole.

Warning: Before drilling, make sure that there is no pipeline or cable buried in the wall that needs to be punched.

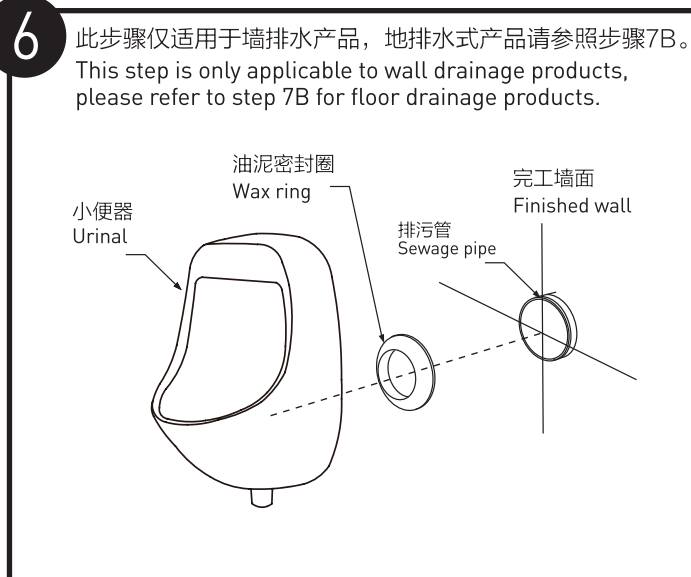

撕开油泥密封圈上的保护纸，将油泥密封圈粘在小便器排污口上，对准排污管后压入，确保密封良好。

Tear off the protective paper of the wax ring, and then stick the wax ring on the drain port of the urinal. Align the wax ring with the drain pipe and press it toward the pipe to ensure a good seal.

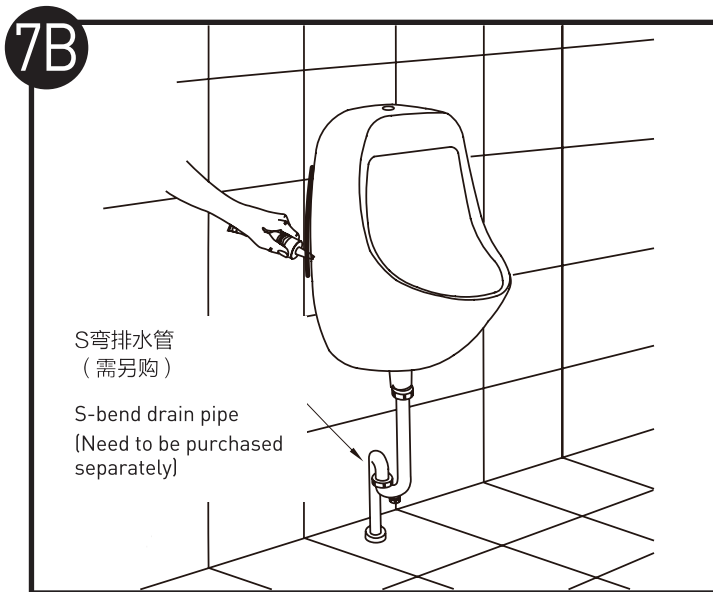

先安装S弯排水管，将密封圈与小便器排污口连接的地方涂抹硅胶后，把小便器安装在刮片上。然后在小便器与墙面接触的边缘，涂抹硅胶以此填平接触缝隙。

Install the S-bend drain pipe first. Apply silica gel to the place where the wax ring is connected to the drain port of the urinal, and then install the urinal on the scraper. Apply mildew-proof silicone to the edge where urinal touches the wall.

清洁与维护 Cleaning and Maintenance

Please clean and maintain the product regularly for the normal use of the product.

- Please use it in an environment above 0°C. In an environment below 0°C, product traps cannot store water, otherwise the water may freeze and expand, which may damage the product.
- Clean ceramic and plated surfaces with neutral soapy water, then thoroughly dry the entire surface with a clean, soft cloth.
- Many cleaners may contain chemicals, such as ammonia chlorine, toilet cleaner etc., which could adversely affect the finish and are not recommended for cleaning.
- Don't use abrasive cleaner or solvents on this product and fitting.
- Please use tap water or potable water as the water source for the urinal. Do not use treated water or sewage with impurities or acid/alkali.

©2025 Fortune Brands Innovations Incorporated