

### DESCRIPTION



- Metal construction with a chrome finish
- G3/8 turn to G1/2 inlet connections
- Includes Metal pop-up type waste assembly
- Includes 600mm long flexible inlet hoses

### OPERATION



- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

### FLOW



- Flowrate is 0.2L/s minimum under 0.3Mpa

### CARTRIDGE



- MOEN Duralast 146565 cartridge design
- Nonmetallic / nonferrous and ceramic material

### STANDARD




- Designed to meet GB standard





### WARRANTY



- 5 years limited warranty against leaks and drips

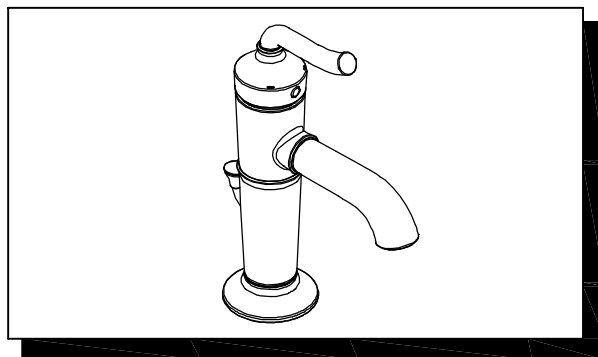

Neoclassic One Handle Single Mount Lavatory  
MODEL: 16121

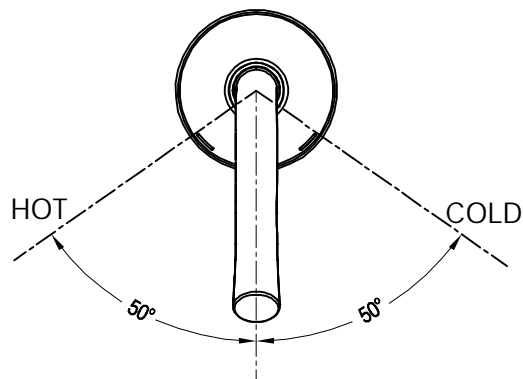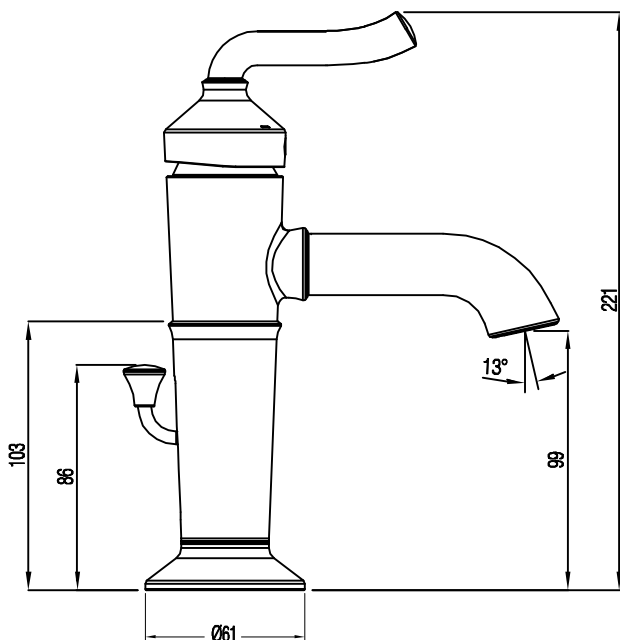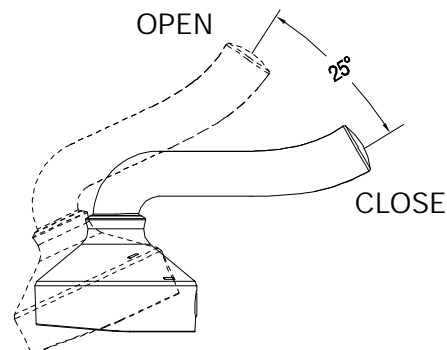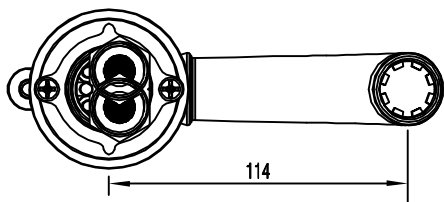

### CRITICAL DIMENSION

(DO NOT SCALE)