Specifications

DESCRIPTION
- Metal construction with chrome finish
- G1/2 connections
- Includes 5F hand-held shower, wall bracket and 1.5m shower hose


OPERATION
- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 110 degree arc of handle travel

FLOW
- Flowrate at 0.3Mpa : about 11L/min with handheld shower

CARTRIDGE
- Ceramic 35mm cartridge
- Nonmetallic / nonferrous and ceramic material

STANDARD
- Designed to meet GB 18145


WARRANTY
- 5 years limited warranty against leaks and drips

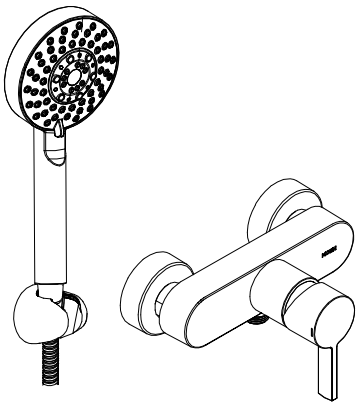



STEROPE


Single Handle Wall Mount Tub Shower Faucet

Models: 57135

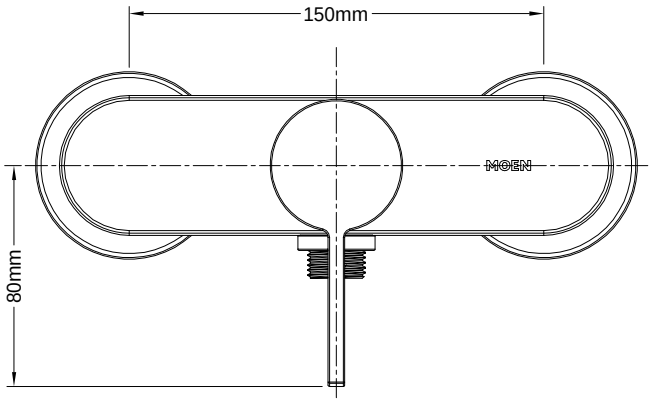

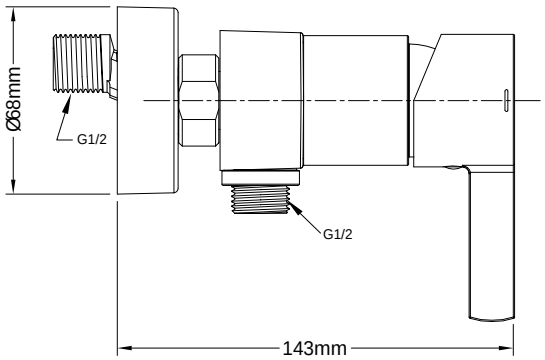

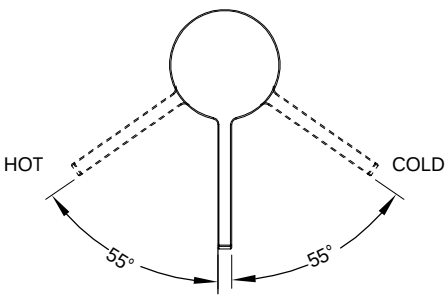



CRITICAL DIMENSION


(DO NOT SCALE)

Rev 06/10/2014

12/6/2013 SPC1418A
Released All


Specifications

5 Funtion Plastic Handheld Shower
APPLIED WITH AIR-IN TECHNOLOGY
. Massage
. Massage Spray
. Spray
. Bubbling Spray
. Bubbling

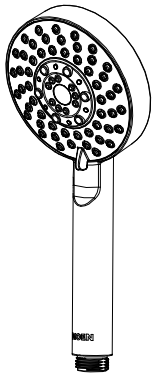

5F Handle Held Shower

Models: 172391

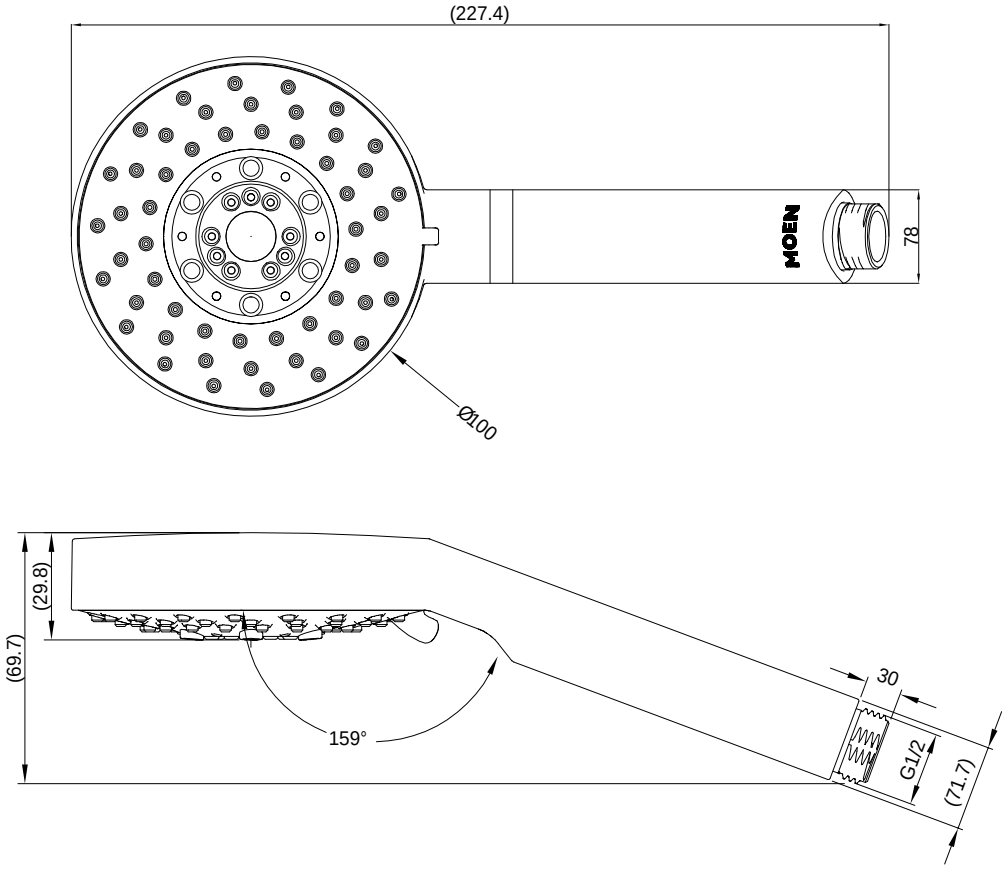

CRITICAL DIMENSION

(DO NOT SCALE)

Rev 06/10/2014

12/6/2013 SPCT-1418r
Released 6/0