MOEN®

SPECIFICATIONS

Sleek™

Single Handle Pre-Rinse Spring Pulldown Kitchen Faucet

MODELS: 5925 series

NOTE: this faucet is designed to be installed through 1 or 3 holes, 1-1/2" (38mm) min. dia.

GREEN UPC ®

DESCRIPTION

- Metal construction
- Comes in various finishes identified by suffix
- 1-hole or 3-holes installation (deckplate included)
- Installs with handle on right side of faucet
- Includes
  - Duralock™ quick connect for easier installation
  - Power Clean™ spray technology for faster cleaning
  - PowerBoost™ technology for faster fill of pots and even more cleaning power
  - Reflex™ pulldown wand system with 68" braided hose for smooth operation, maneuverability, and secure wand docking
  - High-arc spout design provides additional room for cleaning and filling large pots.

OPERATION

- Operates in both stream or spray modes when wand is docked or pulled down
- Lever-style handle operates with less than 5lbs. of force
- Temperature controlled by 100° arc of handle travel

FLOW

- 1.5 gpm (5.7 L/min) max at 60 psi
- PowerBoost™ increases flow rate with push of a button

CARTRIDGE

- 1269 ceramic disc cartridge for single-handle faucets

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9 & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

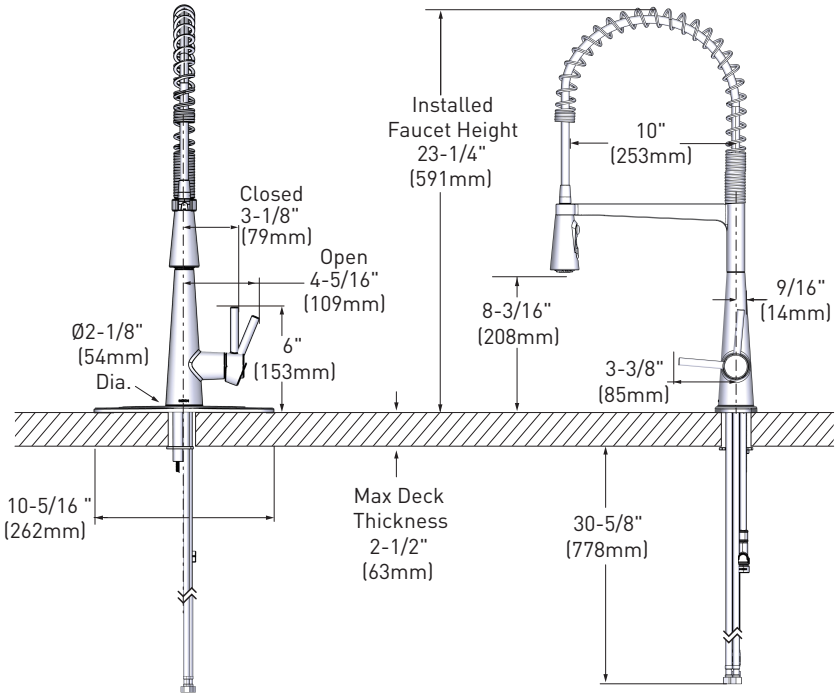

1-800-BUY-MOEN
www.moen.com

04/30/2026 SPC16062 S000042912b
Released 01