



Specifications

DESCRIPTION



- Metal construction with a chrome finish
- G1/2 inlet connections
- Includes Metal pop-up type waste assembly
- Includes 400mm long flexible inlet hoses

OPERATION



- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel
- +/- 8° adjustable aerator

FLOW



- Flowrate is 0.2L/s minimum under 0.3Mpa

CARTRIDGE



- MOEN Duralast 146565 cartridge design
- Nonmetallic / nonferrous and ceramic material

STANDARD




- Designed to meet GB standard




WARRANTY




- 5 years limited warranty against leaks and drips

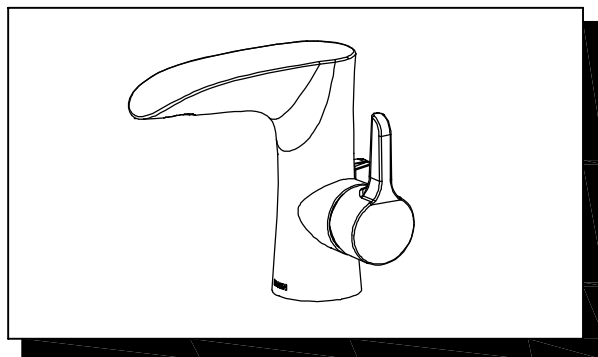

Cynthia One Handle Single Mount Lavatory
MODEL: 66121

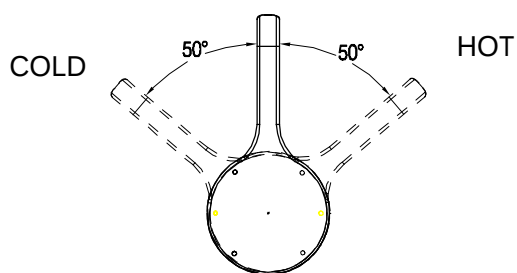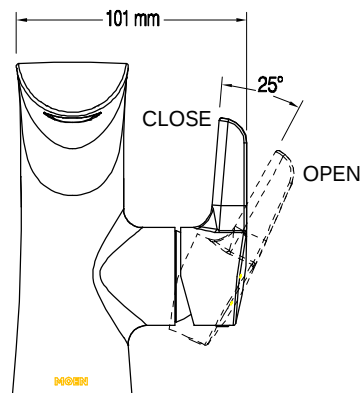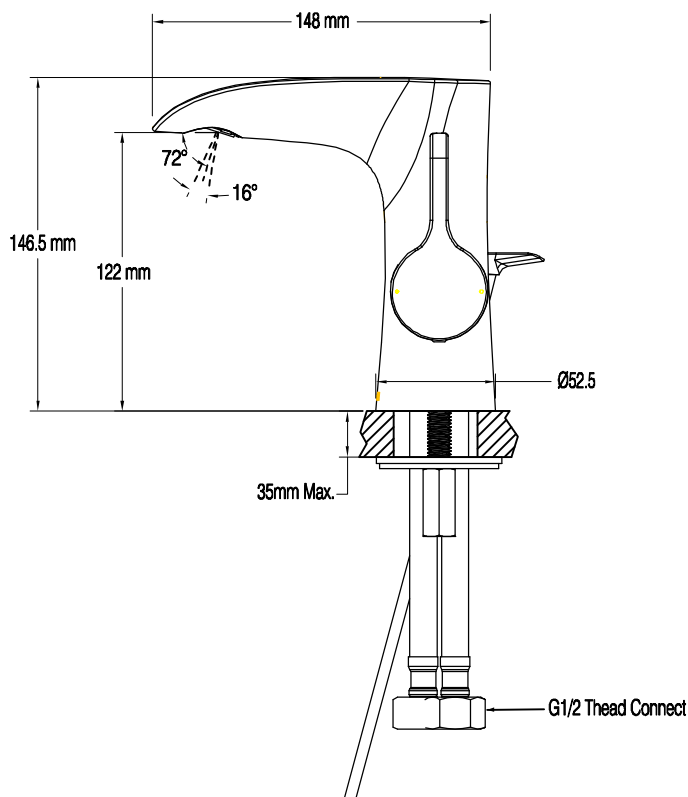

USAGE OF ADJUSTABLE
STREAM DIRECTION



CRITICAL DIMENSION

(DO NOT SCALE)