



Specifications

DESCRIPTION

- Metal construction with a chrome finish
- R1/2 inlet connections
- Thermostatic valve design can connect with bar shower and handheld shower

OPERATION

- Round style handle; Rotation style spout
- Temperature lever operates through a 270 degree arc with maximum cold at full counterclockwise rotation and maximum hot at full clockwise rotation
- Safety stop preset temperature at 40 degrees calibration
- Safety stop override allows maximum temperature at 60 degrees C
- Factory established temperature range from 15 degrees C to 60 degrees C

FLOW

- Follower rate is 0.33L/s minimum under 0.3MPa

CARTRIDGE


- 124590 thermostatic cartridge design with Nonmetallic / non-ferrous material

STANDARD

- Designed to meet GB18145-2003 standard



WARRANTY

- 5 years limited warranty against leaks and drips

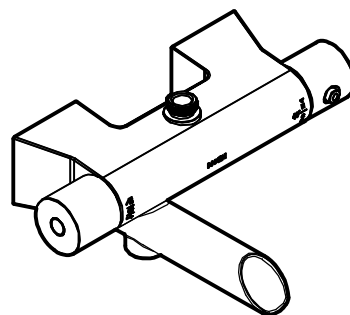

Cascata
Two-Handle Wall Mount Shower

Models: 88132

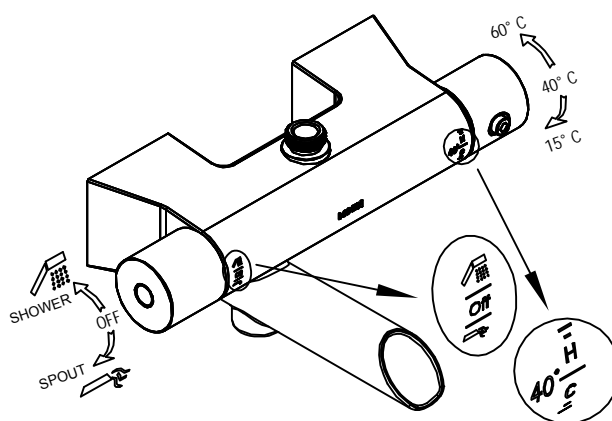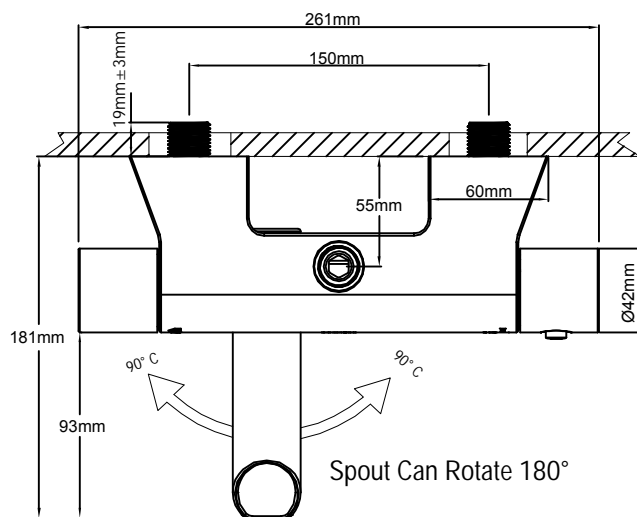

CRITICAL DIMENSION

(DO NOT SCALE)

Rev 11/22/07