



- Metal construction with chrome finish
- G 1/2" inlet connections
- Includes 5F hand-held shower, shower holder and shower hose


- Lever style handle
- Rotate hot side counterclockwise to open (clockwise to close) and rotate cold side clockwise to open (counterclockwise to close)

- Flowrate is about 8.5L/min at 0.3Mpa with handheld shower and hose
- Flowrate is about 4.6L/min at 0.1Mpa with handheld shower and hose


- Ceramic cartridge design
- Nonmetallic /nonferrous and ceramic material

- Designed to meet GB 18145

- 5 years limited warranty against leaks and drips

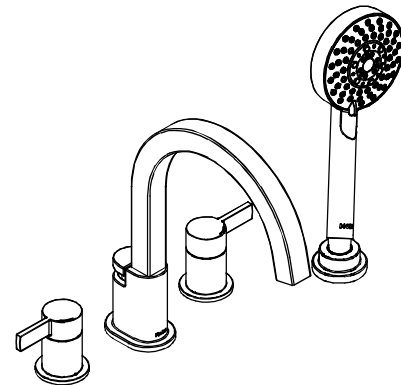

NOTE : THIS FAUCET IS DESIGNED TO BE INSTALLED THRU
4 HOLES, 32mm MIN. DIA

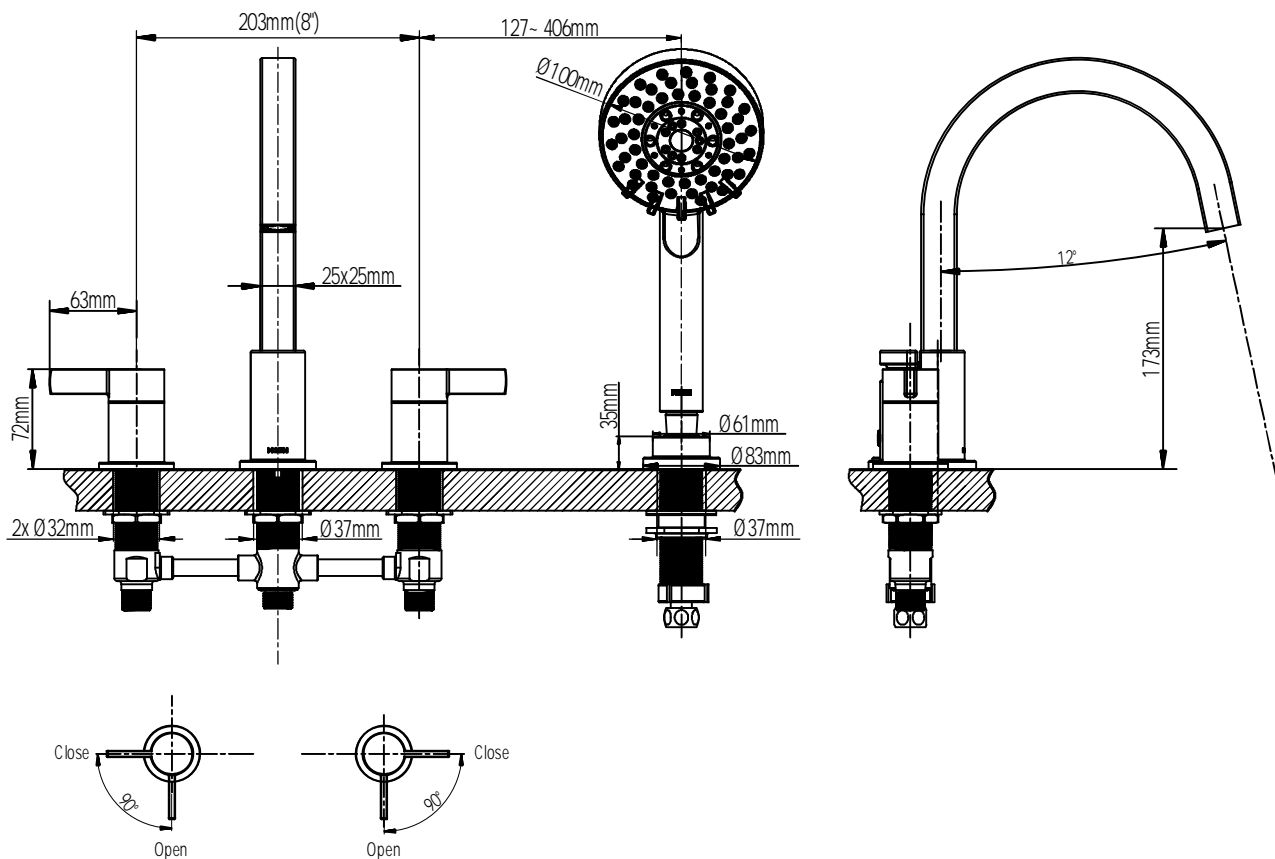

Rev 04/2017