

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 connections
- Includes 400mm long inlet hoses, except GN10122MCL01 with 600mm inlet hoses
- Including plastic POP-UP waste.

OPERATION

- Lever Style handle
- Pull-on/ Push-off
- Temperature controlled through 90 degree arc of handle travel

FLOW

- Flowrate is about 3.0L/min to 4.5L/min at 0.1Mpa

CARTRIDGE


- Ceramic 35mm cartridge design
- Ceramic material

STANDARDS

- Desigend to meet GB 18145, GB 25501 (Grade 1)

WARRANTY





- 5 years limited warranty against leaks and drips

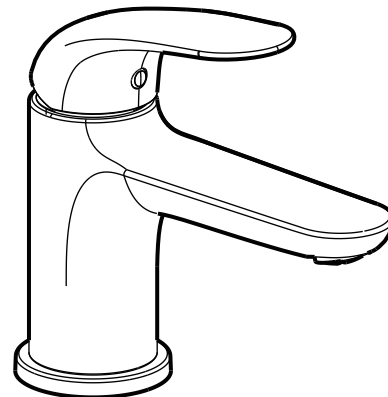

WALES

Single Mount Single-Handle Lavatory Facuet

MODELS : GN10122 Series

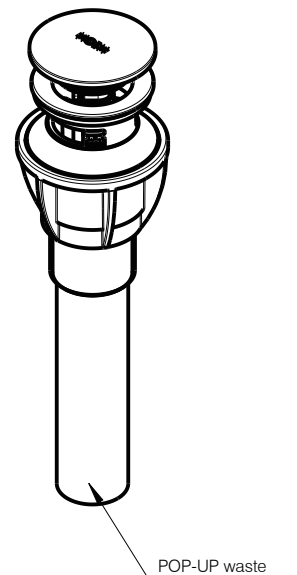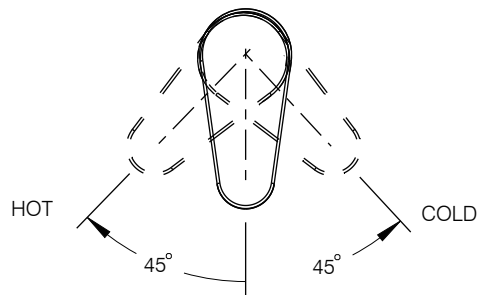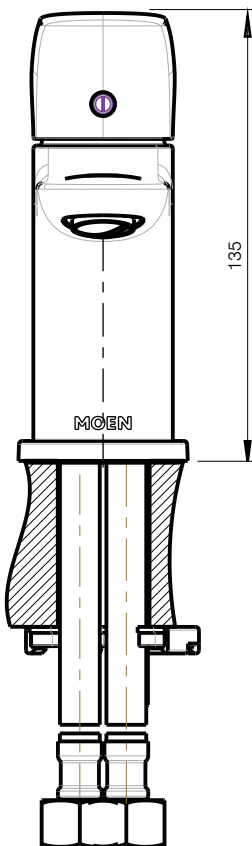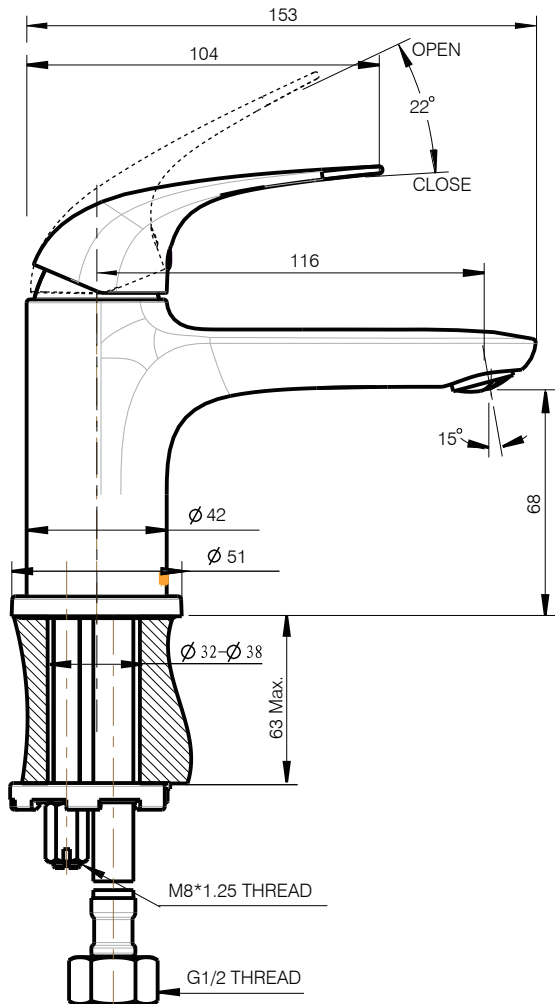

CRITICAL DIMENSIONS DO NOT SCALE

Unite: mm