MOEN

Specifications

DESCRIPTION

- Metal construction with a chrome finish
- G1/2 inlet connections
- Include 600mm flexible inlet hoses

OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 90 degree arc of handle travel

FLOW

- Flow is limited to 8.3 L/min at 0.41Mpa with aerator
- Flowrate is about 5.73L/min at 0.3Mpa with aerator
- Flowrate is about 3.38L/min at 0.1Mpa with aerator

CARTRIDGE


• Ø 25mm ceramic cartridge

STANDARDS

• Design to meet GB 18145; GB 25501

WARRANTY

• 5 years limited warranty against leaks and drips




CAMELLIA

Single Handle low Arc Kitchen Faucet

MODELS: GN50100MCL01

NOTE: See reverse side for illustrated parts

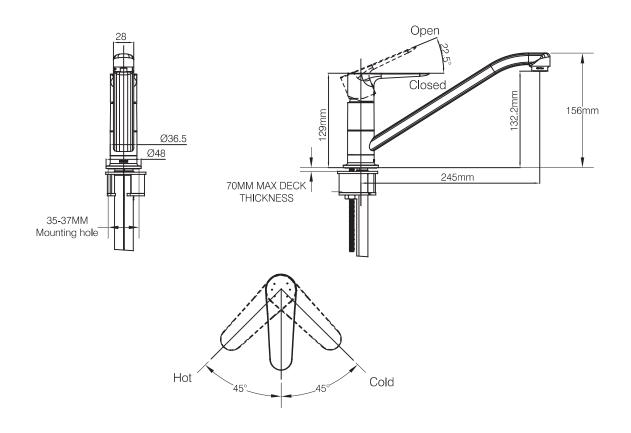

CRITICAL DIMENSIONS DO NOT SCALE