MOEN.

Specifications

DESCRIPTION

- Metal construction with chrome finish
- G1/2" inlet connections

OPERATION

- Lever style handle
- Pull-on/Push-off
- Temperature controlled through 100° arc of handle travel

FLOW

- Flowrate is about 3.6L/min at 0.1 Mpa with aerator
- Flowrate is about 6.0L/min at 0.3Mpa with aerator

CARTRIDGE


• Moen Duralast cartridge design

STANDARD


• Designed to meet GB18145

WARRANTY

• 5 years limited warranty against leaks and drips



Sterope Single-Handle Wall-Mount Lavatory Faucet Model: GN57139VN

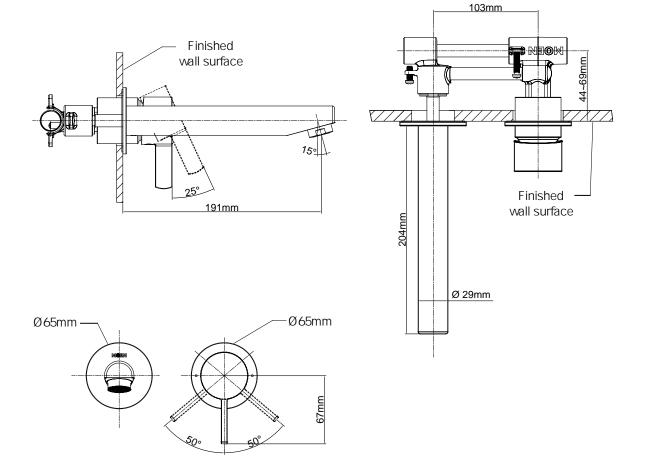

(DO NOT SCALE)