



## Specifications

### DESCRIPTION

- Metal construction with chrome finish
- G1/2" inlet connections
- Includes half-half pop-up waste assembly
- Quick connect installation

### OPERATION

- Lever style handle
- Rotate hot side counterclockwise to open (clockwise to close) and rotate cold side clockwise to open (counterclockwise to close)

### FLOW

- Flowrate is about 6.2L/min at 0.3Mpa with aerator
- Flowrate is about 3.5L/min at 0.1Mpa with aerator

### CARTRIDGE


- Moen 2H Duralast cartridge

### STANDARD

- Designed to meet GB 18145

### WARRANTY


- 5 years limited warranty against leaks and drips

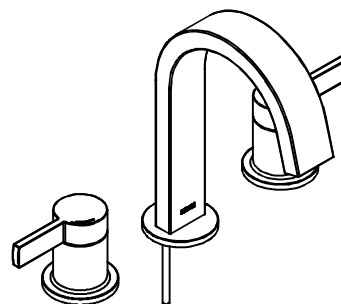

Stereop Two Handle Widespread  
Lavatory Faucet

Models: GN57228

NOTE : THIS FAUCET IS DESIGNED TO BE INSTALLED THRU  
3 HOLES ,34MM MIN.DIA TO 37MM MAX.DIA.HOLE

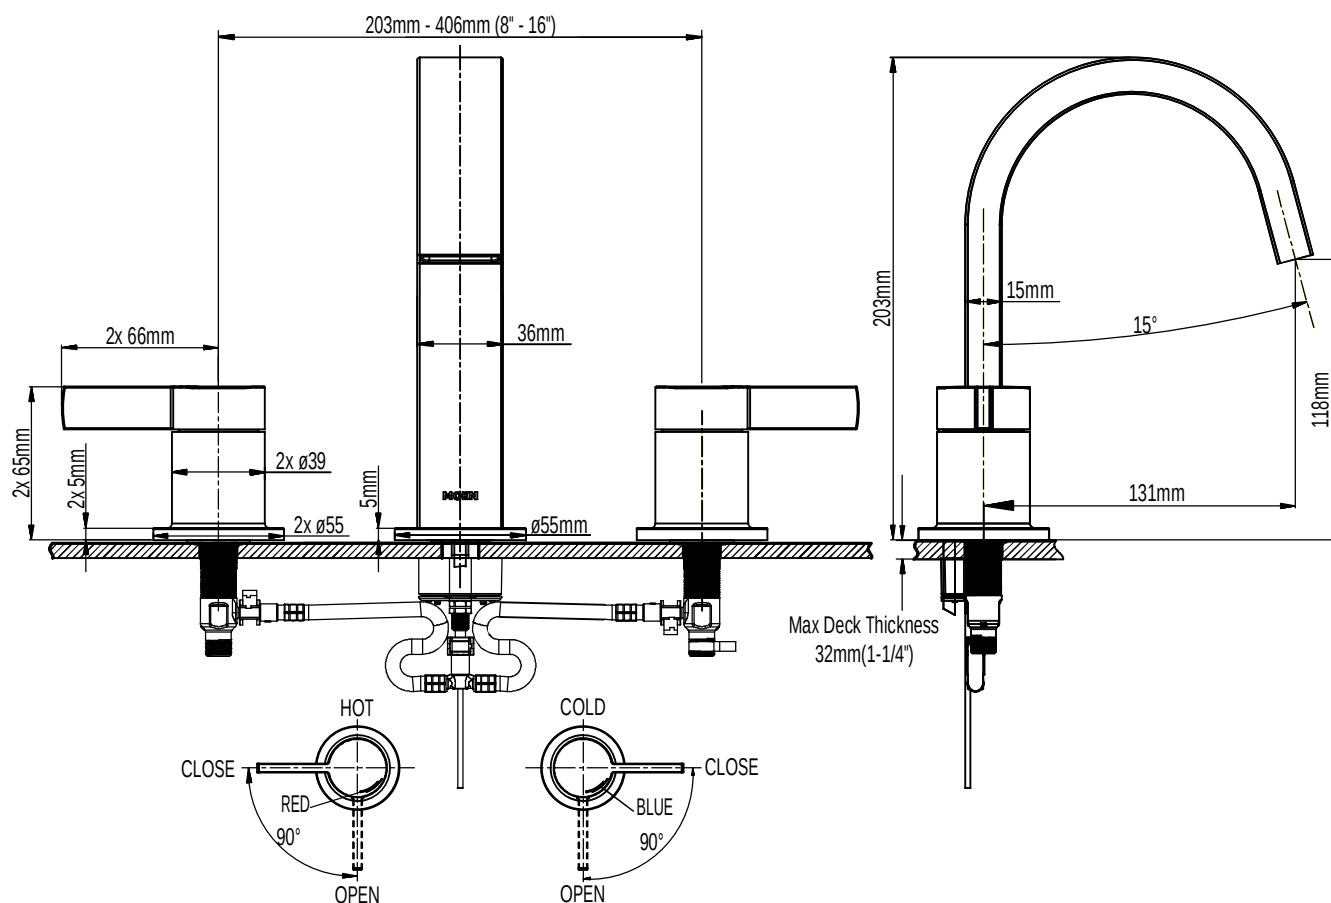

CRITICAL DIMENSION  
(DO NOT SCALE)