

MOEN

Specifications

DESCRIPTION

- Reflex system offers smooth operation, easy movement, self-retraction, and secure docking .
- G1/2 inlet connections.
- Metal construction with chrome finish.
- 360° rotating spout .

OPERATION

- Lever style handle .
- Operates with less than 5 lbs. of force.

FLOW

- Water flowrate is about 3.0L/min to 4.5L/min at 0.1 Mpa.
- Water flow difference is limited to 3.0 L/min minimum from 0.1 Mpa to 0.3 Mpa .

CARTRIDGE


- Ceramic cartridge .

STANDARDS

- Designed to meet GB 18145 ; GB 25501.


WARRANTY

- 5 years limited warranty against leaks and drips .

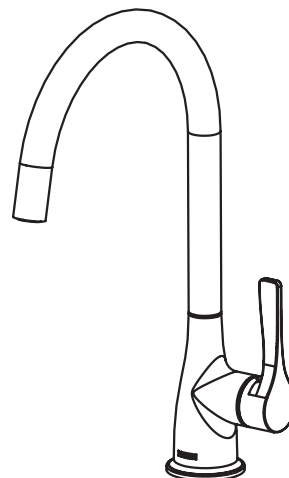

WALES
SINGLE HANDLE HIGH ARC COLD ONLY
KITCHEN FAUCET CHR

MODELS : GN60502

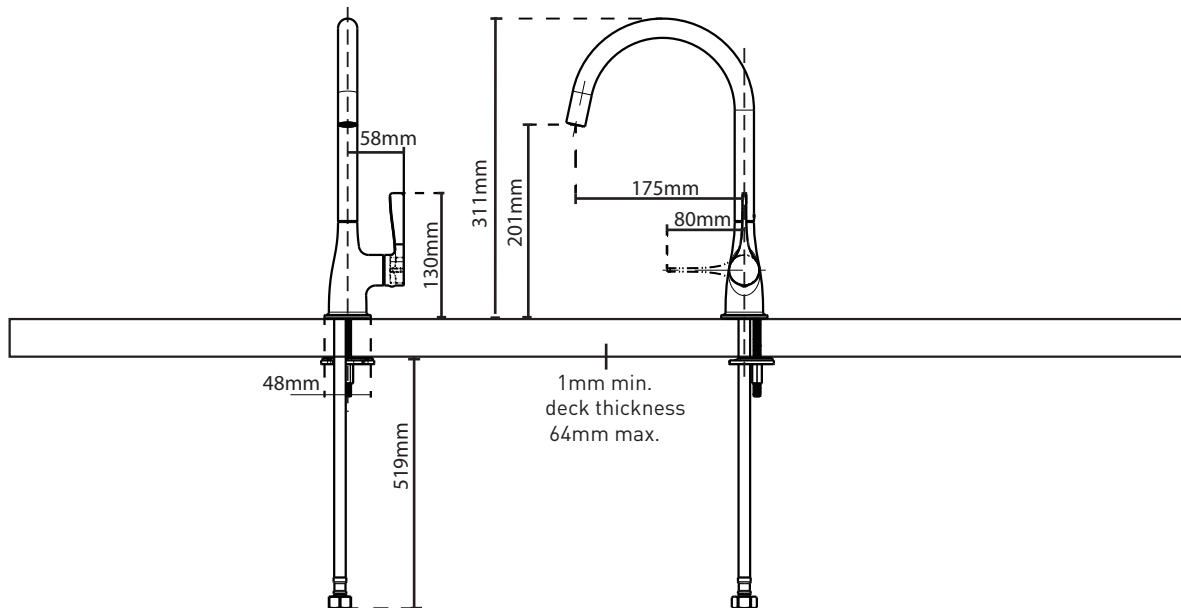

CRITICAL DIMENSIONS DO NOT SCALE