



Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 inlet connections
- Includes 400mm long flexible inlet hoses
- Pullout spray with 1350mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Water flowrate is about 2.5L/min at 0.1Mpa with aerator.
- Water flowrate is about 4.45L/min at 0.3Mpa with aerator.
- Spray water flowrate is about 4.25L/min at 0.3Mpa.

CARTRIDGE


- MOEN Duralast cartridge.

STANDARD

- Designed to meet GB 18145

WARRANTY

- 5years limited warranty against leaks and drips

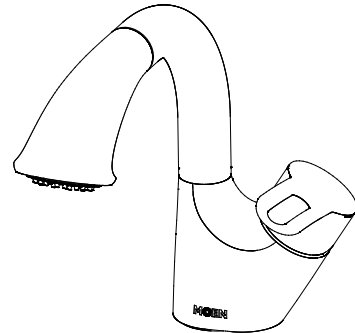

KERRY

Single Handle Pullout Lavatory Faucet

Models: GN89122/ GN89122SRN/
GN89122WK/ GN89122BL

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THRU 34mm MIN. TO 38mm
MAX. DIA. HOLE

