

MOEN® 摩恩

Specifications

DESCRIPTION

- Various finishes identified by suffix
- Reflex™ pulldown system offers smoother operation, easy movement and secure docking
- 3-function wand technology provides the maneuverability for cleaning or rinsing
- Waterfall mode provides a powerfully concentrated rinse for faster clean up and less splash
- G1/2 inlet connections
- 600mm flexible supply lines with G1/2" compression fittings
- Pulldown spray with 1350mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Water flowrate is about 3.0 L/min to 4.5 L/min at 0.1 Mpa
- Water flow difference is limited to 3.0 L/min maximum from 0.1 Mpa to 0.3 Mpa

CARTRIDGE


- MOEN Duralast cartridge

STANDARDS

- Designed to meet GB 18145; GB 25501

WARRANTY

- 5 years limited warranty against leaks and drips

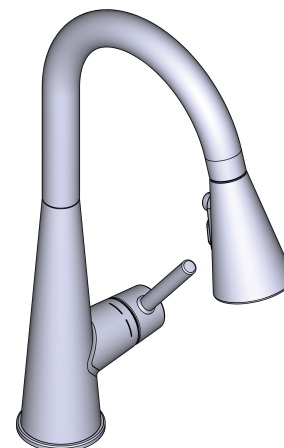


Sleek

One-Handle Pulldown Kitchen Faucet

MODELS : GNMCL7864DP series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED
THRU 34mm MIN. TO 38mm MAX. DIA. HOLE

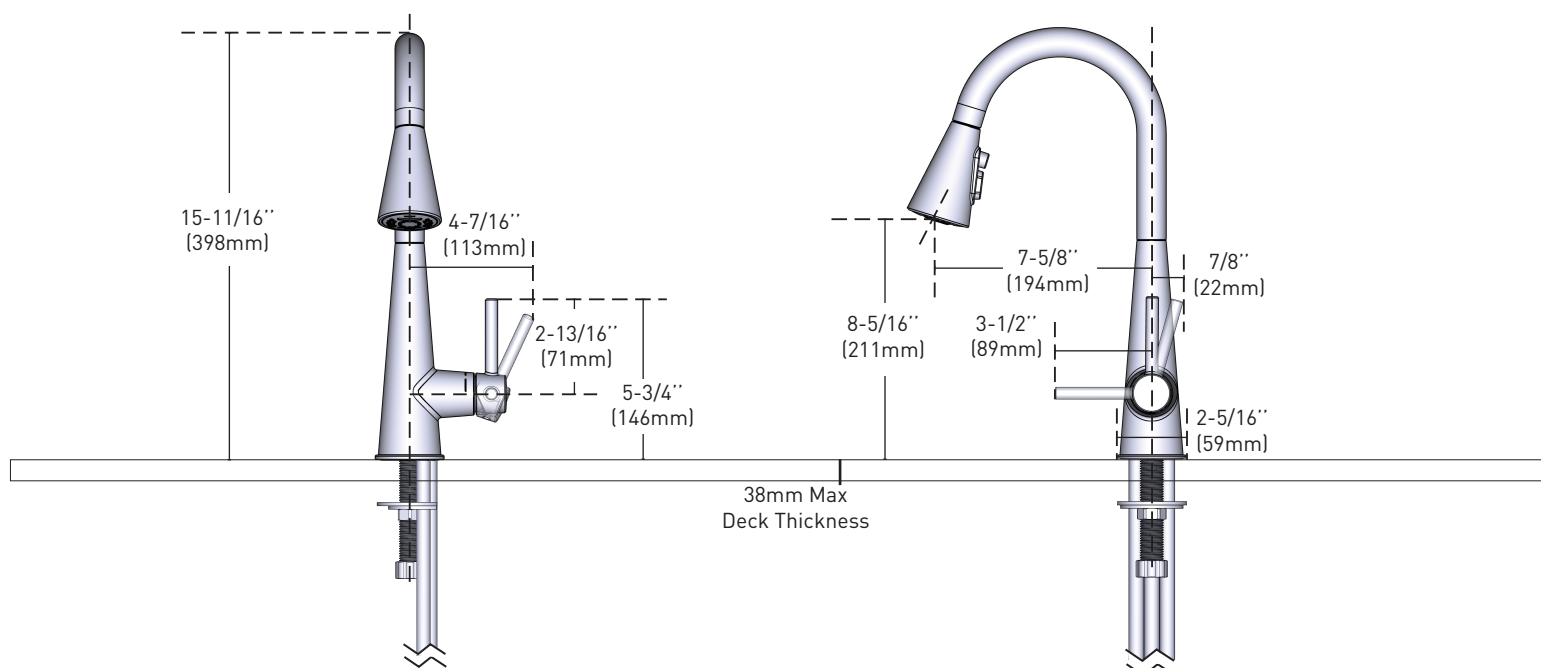

CRITICAL DIMENSIONS DO NOT SCALE