

MOEN® 摩恩

DESCRIPTION

- Metal construction with chrome and spot resistant stainless various finishes

OPERATION

- Lever Style handle
- Pull-on/ Push-off
- Temperature controlled through 110 degree arc of handle travel

FLOW

- Flowrate is 6.0 L/min minimum @ 0.1Mpa
- Flowrate is 4.0L/min~9.0L/min with shower @ 0.1Mpa


STANDARDS

- Designed to meet GB 18145

WARRANTY




- 5 years limited warranty against leaks and drips

Specifications

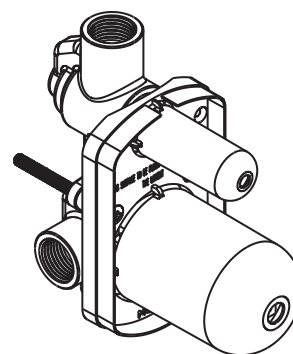

In Wall Tub Shower Rough in

MODELS: R3500
R3500BL
R3500SRN
R3500BZG

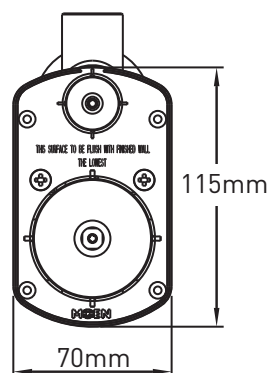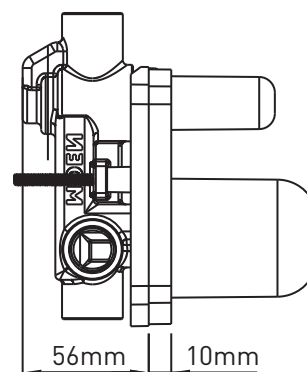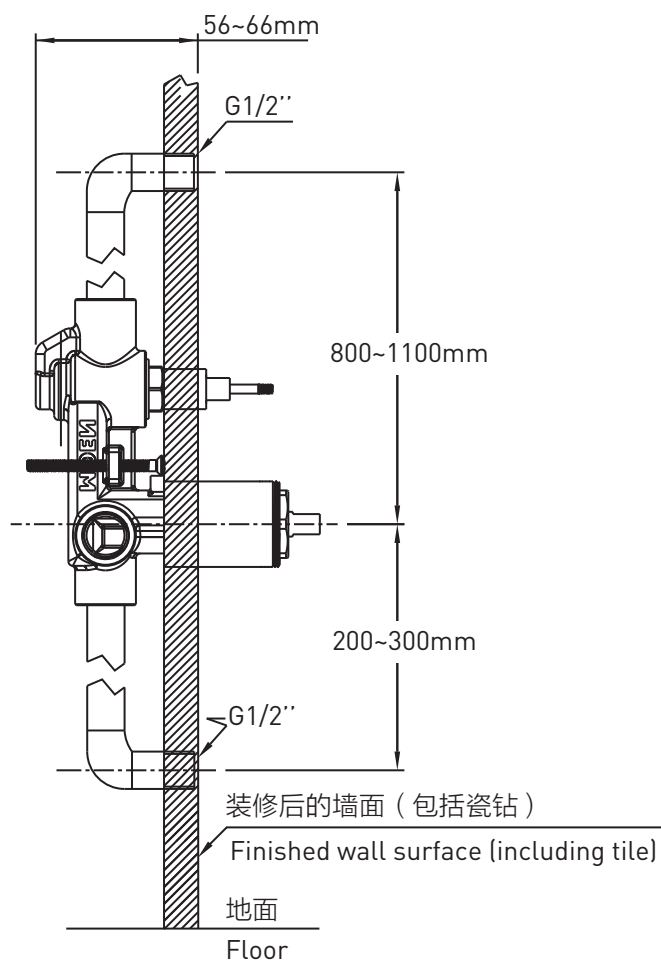

CRITICAL DIMENSIONS DO NOT SCALE