

MOEN® 摩恩

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- G1/2 inlet connections
- Includes 600mm long flexible inlet hoses
- Pullout spray with 1700mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pull out wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Water flowrate is about 3.1L/min at 0.1Mpa with aerator
- Water flowrate is about 5.8L/min at 0.3Mpa with aerator

CARTRIDGE


- MOEN Duralast cartridge

STANDARDS

- Designed to meet GB 18145

WARRANTY

- 5 years limited warranty against leaks and drips

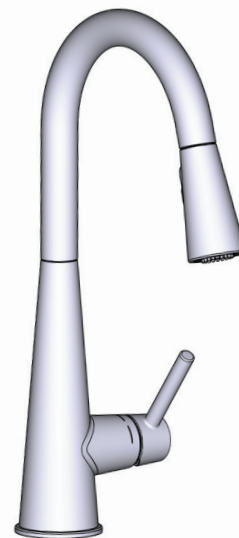


SLEEK

Single Handle High Arc
Pulldown Kitchen Faucet

MODELS: GNMCL7864/ GNMCL7864SRS/ GNMCL7864BL/
GNMCL7864SBL/ GNMCL7864GG

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU
34mm MIN. TO 38mm MAX. DIA. HOLE

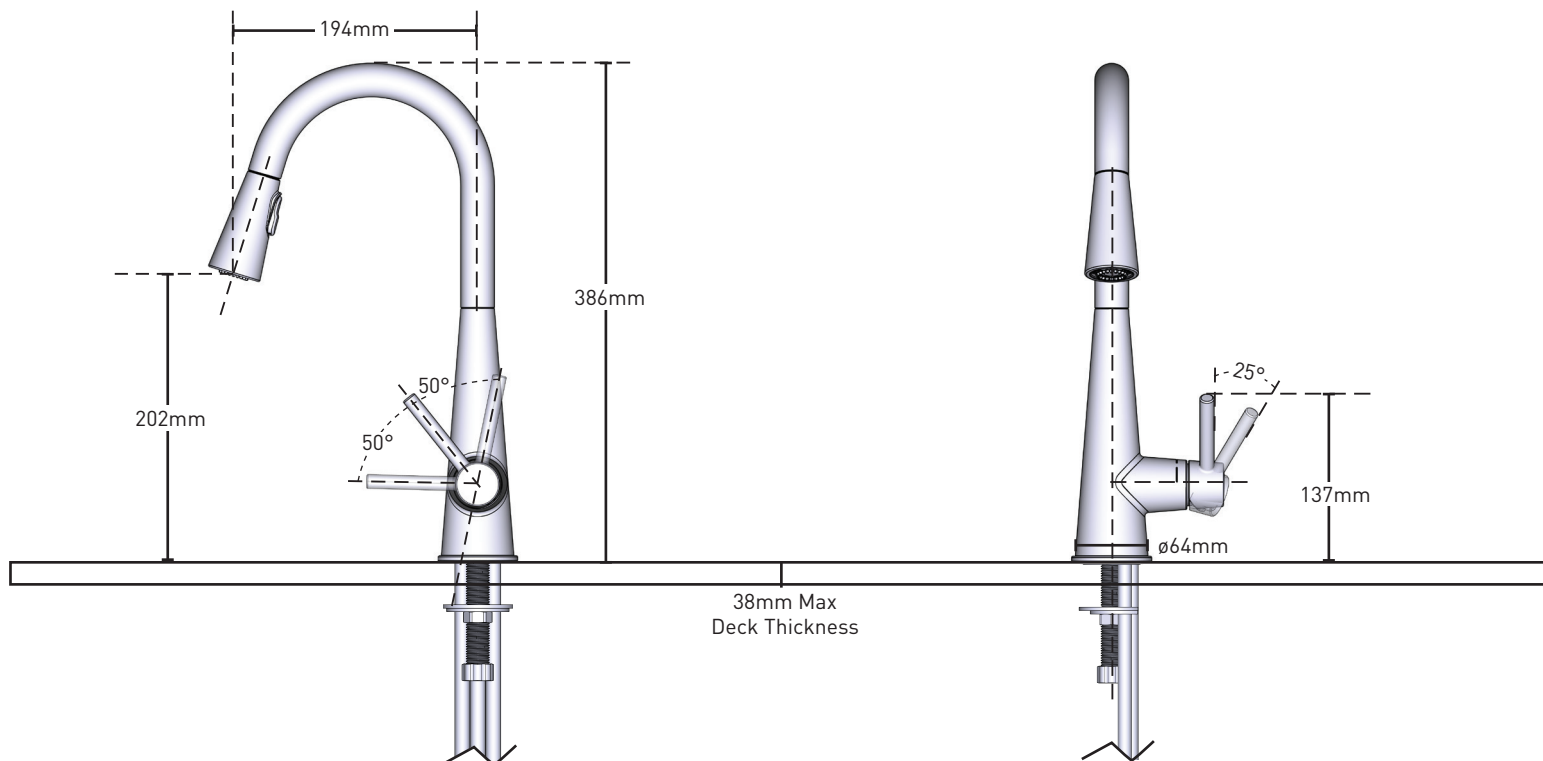

CRITICAL DIMENSIONS DO NOT SCALE