MOEN® 摩恩®

规格书
SPECIFICATIONS

DESCRIPTION
- Metal construction with various finishes identified by suffix
- 600mm Flexible supplies with G1/2 inlet connections
- Includes pop-up waste assembly


OPERATION
- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

FLOW
- Flowrate is 3.0L/min minimum at 0.1MPa

CARTRIDGE
- MOEN Duralast cartridge
- Nonmetallic / nonferrous and ceramic material

STANDARD
(Unless otherwise dated, it is considered to be the latest version)
- Conforms to GB 18145; GB 25501


WARRANTY
- 5-year limited warranty for cartridge, 2-year limited warranty for other accessories (Including hose, handle, aerator, etc.)





FASCINATION
Single Mount Single-Handle Lavatory Faucet

MODELS: GN63121 Series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34MM MIN. TO 38MM MAX.DIA. HOLE

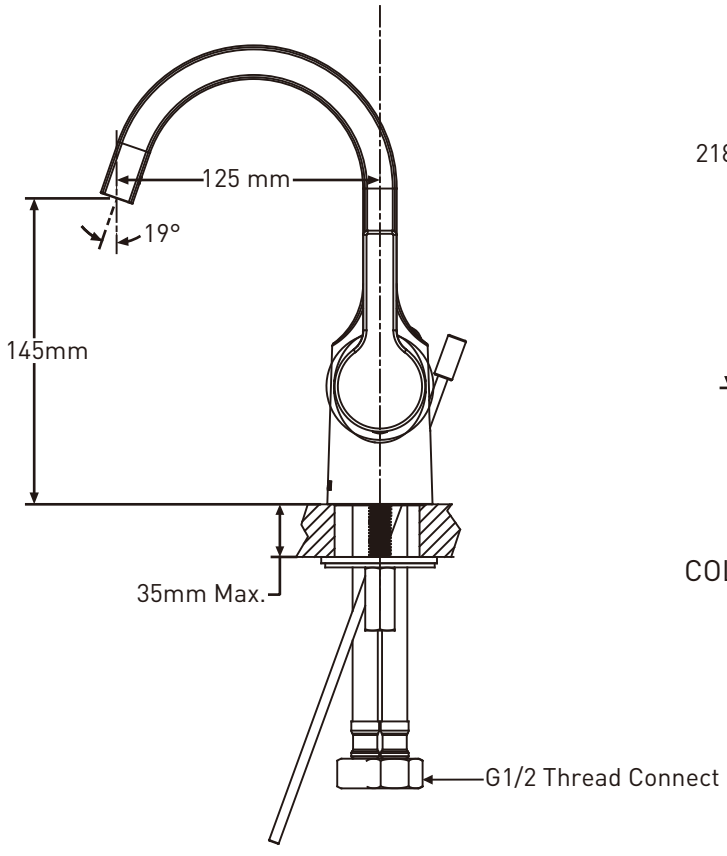

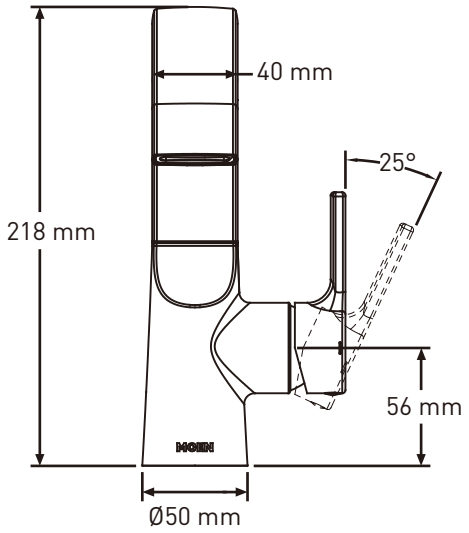

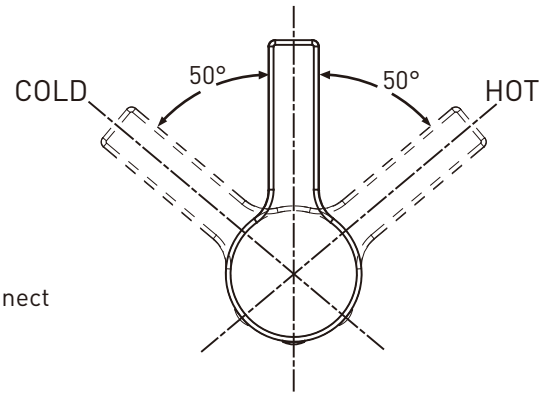

©2026 Fortune Brands Innovations Incorporated

对于中国大陆以外的市场，请咨询当地经销商
订购零件: (中国大陆) 400-630-8866
(中国大陆) www.moen.cn
(中国大陆以外) www.moen.com.hk

For consumers in markets outside the Chinese mainland, please consult the local dealer
TO ORDER PARTS CALL: (Chinese Mainland) 400-630-8866
(Chinese Mainland) www.moen.cn
(Outside Chinese Mainland) www.moen.com.hk

04/07/2026, SPC22873, 3000073509
Replaces 0411