

DESCRIPTION


- Metal construction with a chrome finish
- Designed for two functions and quick connections for usage with R3800 valve

OPERATION

- Flow lever operates through a 360° arc with off at 6 or 12 o'clock and function 1 at 3 o'clock position, function 2 at 9 o'clock position
- Temperature lever operates through a 237° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Factory established temperature range from 20°C to 49°C
- Safety stop preset at 38°C
- Safety stop over-ride allows maximum 49°C

CARTRIDGE

- For ceramic 35mm diverter cartridge 143910 Thermostatic cartridge design

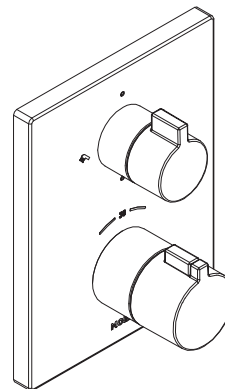




Sterope

Two Function In Wall Thermostatic (Trim Only)


MODELS: T57282 series

NOTES:

Suggest to match with Moen R3800 or any other Moen propositional product.

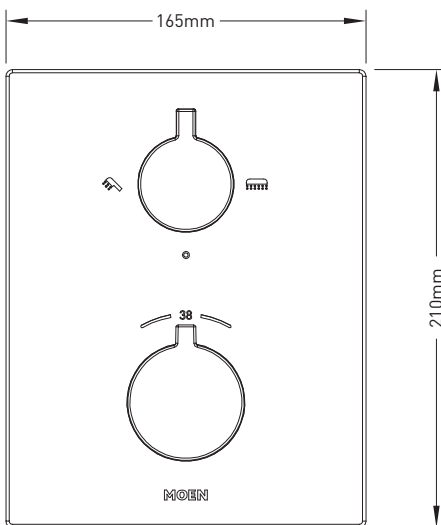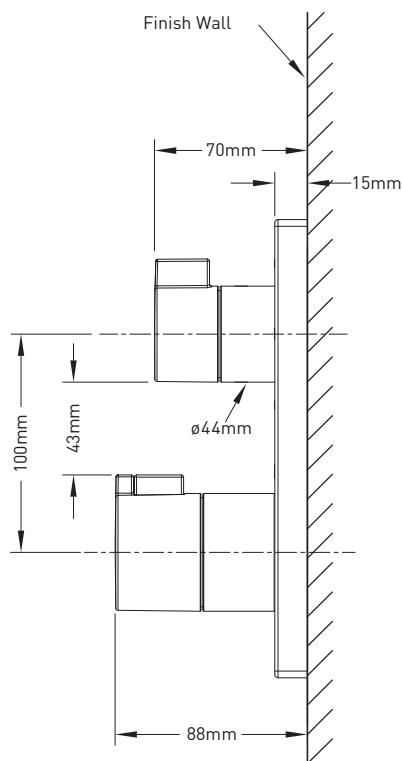

- Press button down and turn the handle anticlockwise, water temperature will go up to 49° C
- Trun the handle clockwise, water temperature will turn to 20° C,

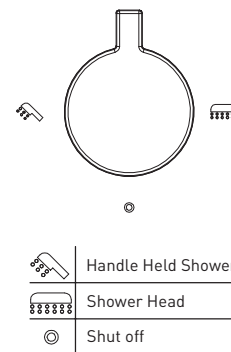

CRITICAL DIMENSIONS DO NOT SCALE