

描述

- 产品尺寸：409 x 64 x 253mm
- 水嘴高度：232mm
- 水嘴长度：197mm
- 以后缀标识区分不同表面处理工艺
- Reflex™ 下拉式龙头系统，操作更顺滑 · 移动更轻松 · 停靠更稳固
- 两功能喷嘴，提供起泡水与花洒水两种模式，满足不同场景需求。
- G1/2进水接口
- 下拉式喷头+1350mm编织软管
- 高弧出水口：提升高度与延伸范围，轻松清洗大锅具，下拉喷嘴：灵活执行清洁/冲洗任务
- 自发电（无需外部电源），当环境光照<10Lux，喷嘴下方10cm处半径3cm范围内的照度为：水压（动压）≥0.2MPa时，照度≥120 Lux
- 360° 旋转出水口：兼容把手左侧或右侧两种安装方式，适配不同厨房水槽布局与用户使用习惯。

操作

- 手柄式把手，把手可在 100° 旋转范围内灵活调节，通过旋转角度精准控制冷热水混合比例，轻松调节适宜出水温度。
- 无论喷头处于拉出状态（延伸清洁）或缩回状态（固定出水），均可自由切换气泡水 / 花洒水功能，无需调整喷嘴位置，操作更高效。

流量

- 0.1MPa时水流量约为3.0L/min至4.5L/min
- 在0.1MPa至0.3MPa范围内，流量差不大于3.0L/min

阀芯

- MOEN Duralast 阀芯


执行标准

（凡不注明日期，即为最新版本）

- 符合GB 18145 & GB 25501

质保期

- 阀芯保修期为5年，其他附件如软管、把手、混水器等保修期均为2年

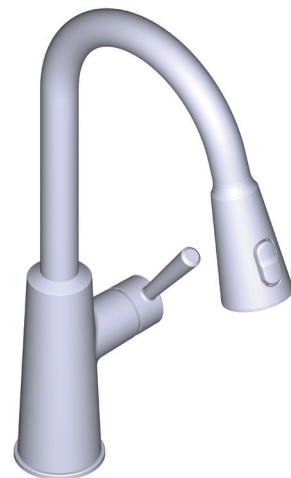


莱丽

单把手抽拉式厨房龙头

型号: GNMCL7402HP系列

注意: 本水龙头设计安装在 34 毫米最小孔径至 38 毫米最大孔径之间。最大孔径 38 毫米

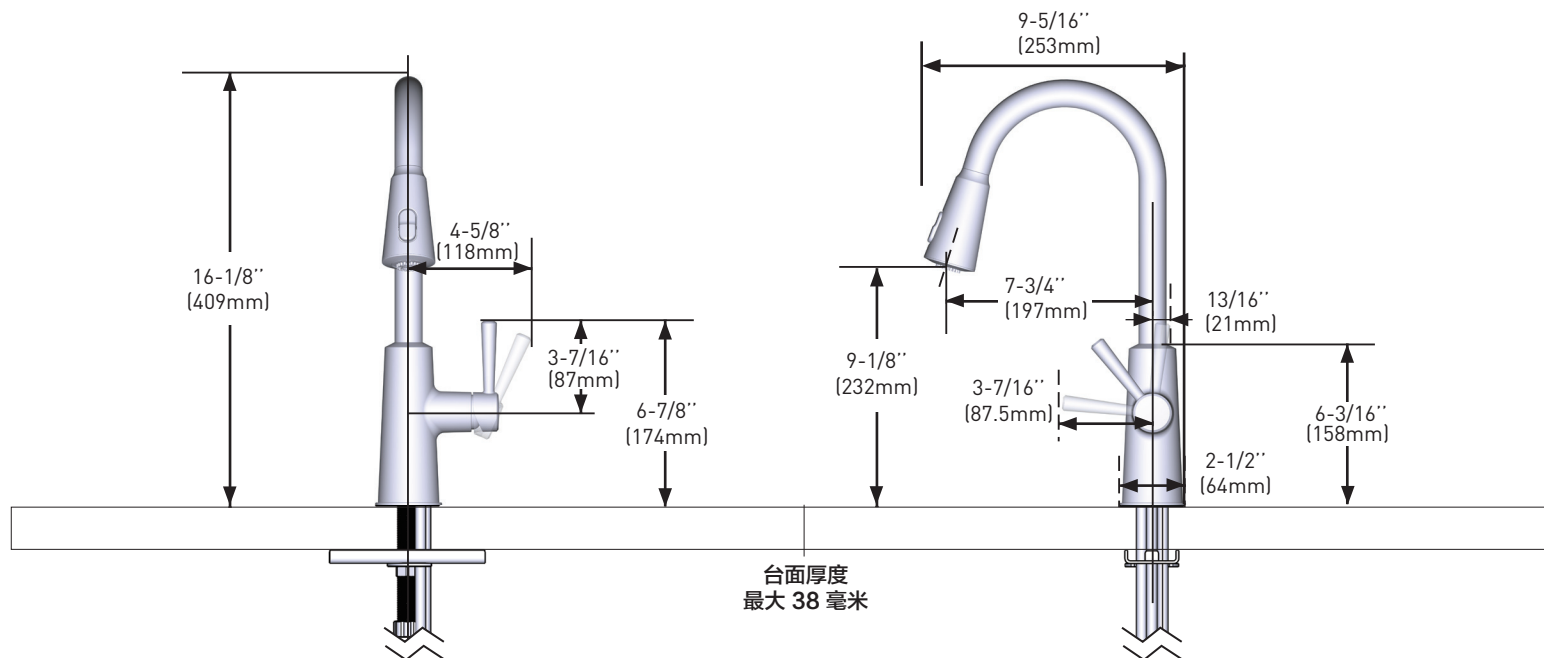

MOEN® 摩恩®

SPECIFICATIONS

DESCRIPTION

Aerated mode and spray mode meeting the needs of different scenarios.

- Product Dimensions: 409 x 64 x 253mm
- Reach Height: 232mm
- Reach Length: 197mm
- Various finishes identified by suffix
- Reflex™ pulldown system offers smoother operation, easy movement and secure docking
- 2-function wand technology provides aerated mode and spray mode meeting the needs of different scenarios.
- G1/2 inlet connections
- 600mm flexible supply lines with G1/2" compression fittings
- Pulldown spray with 1350mm braided hose
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- Self-powered (no external power supply required). When the ambient light intensity is less than 10 Lux, the illuminance within a radius of 3 cm at 10 cm below the nozzle is as follows: when the water pressure (dynamic pressure) is ≥ 0.2 MPa, the illuminance is ≥ 120 Lux
- 360° rotating spout provides ability to install handle on either side

OPERATION

- Lever style handle, temperature controlled by 100° arc of handle travel
- Operates in stream or spray mode in the pulldown or retracted position

FLOW

- Stream water flowrate is about 3.0 L/min to 4.5 L/min at 0.1 Mpa
- Water flow difference is limited to 3.0 L/min maximum from 0.1 Mpa to 0.3 Mpa

CARTRIDGE

- MOEN Duralast cartridge


STANDARDS

(Unless otherwise dated, it is considered to be the latest version)

- Conforms to GB 18145 & GB 25501

WARRANTY

- 5-year limited warranty for cartridge
- 2-year limited warranty for other accessories (Including hose, handle, aerator, etc.)

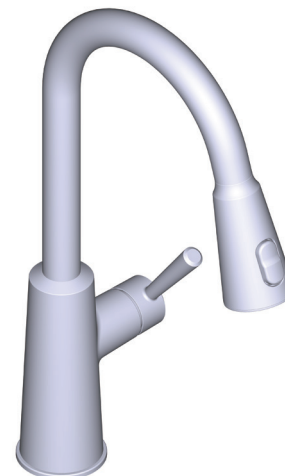

Riley

One-Handle Pulldown Kitchen Faucet

MODELS: GNMCL7402HPseries

NOTES: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX.DIA.HOLE

