




- Metal construction with a chrome finish
- G1/2 inlet connections
- Include 600mm flexible inlet hoses

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel



- Flow is limited to 8.3L/min at 0.4Mpa with aerator
- Flowrate is about 6.52L/min at 0.3Mpa with aerator
- Flowrate is about 4.59L/min at 0.1Mpa with aerator

- Designed to meet GB 18145

- 5 years limited warranty against leaks and drips

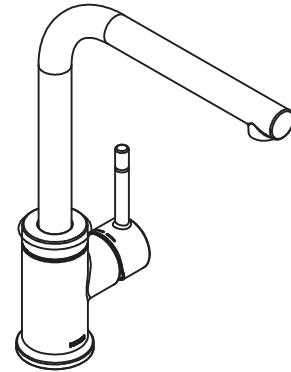

NOTE:SEE REVERSE SIDE FOR ILLUSTRATED PARTS

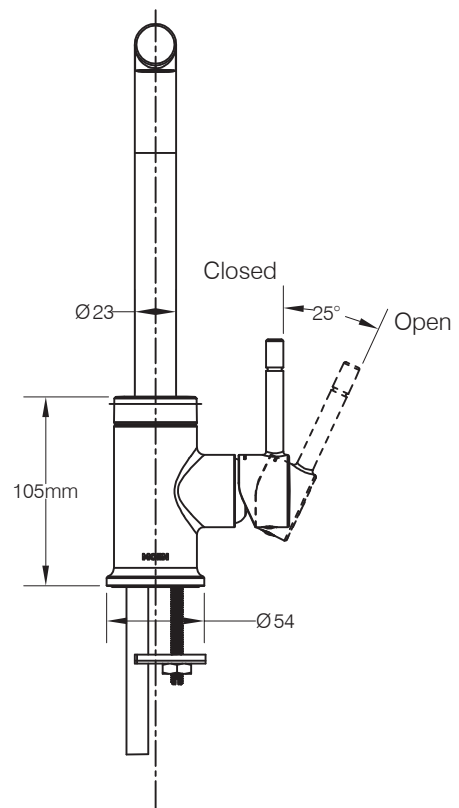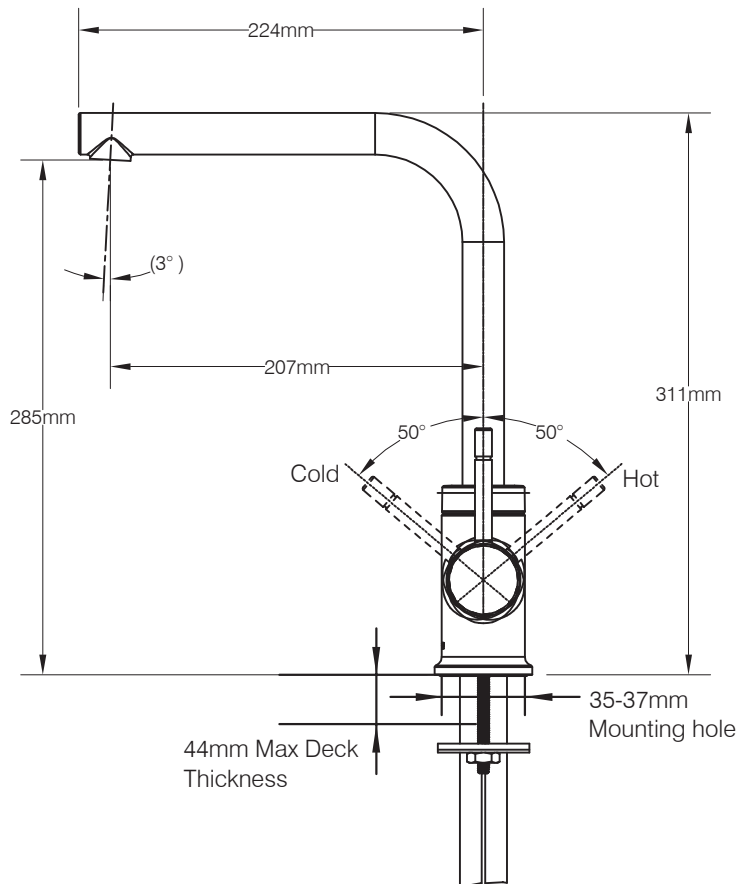

(DO NOT SCALE)