

描述

- 产品尺寸：296 x 137 x 68mm
- 水嘴长度：67mm
- 金属结构，以后缀标识区分不同表面处理工艺
- G1/2 连接接口
- 恒温阀芯设计
- 配备三功能手持淋浴花洒和1500mm淋浴软管

操作

- 旋钮操作手柄
- 温度手柄通过237° 的弧度操作
顺时针旋转达到最大冷，逆时针旋转达到最大热
- 安全止动预设温度为38℃
- 工厂设定的温度范围为15℃至49℃

流量

- 在0.1Mpa下，水流速在浴缸出水口处最低为 6.0L/min
使用软管和手持淋浴时约为 4.0 L/min 到 9.0 L/min

阀芯

- 温控阀芯设计采用非金属/无铁材料


执行标准

(凡不注明日期，即为最新版本)

- 符合 QB/T 2806

质保期


- 阀芯保修期为5年，其他附件如软管、把手、混水器等保修期均为2年

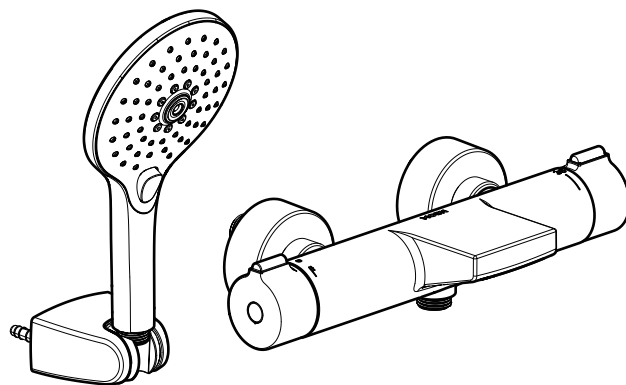

梵溪

恒温浴缸龙头

型号: 63332H 系列

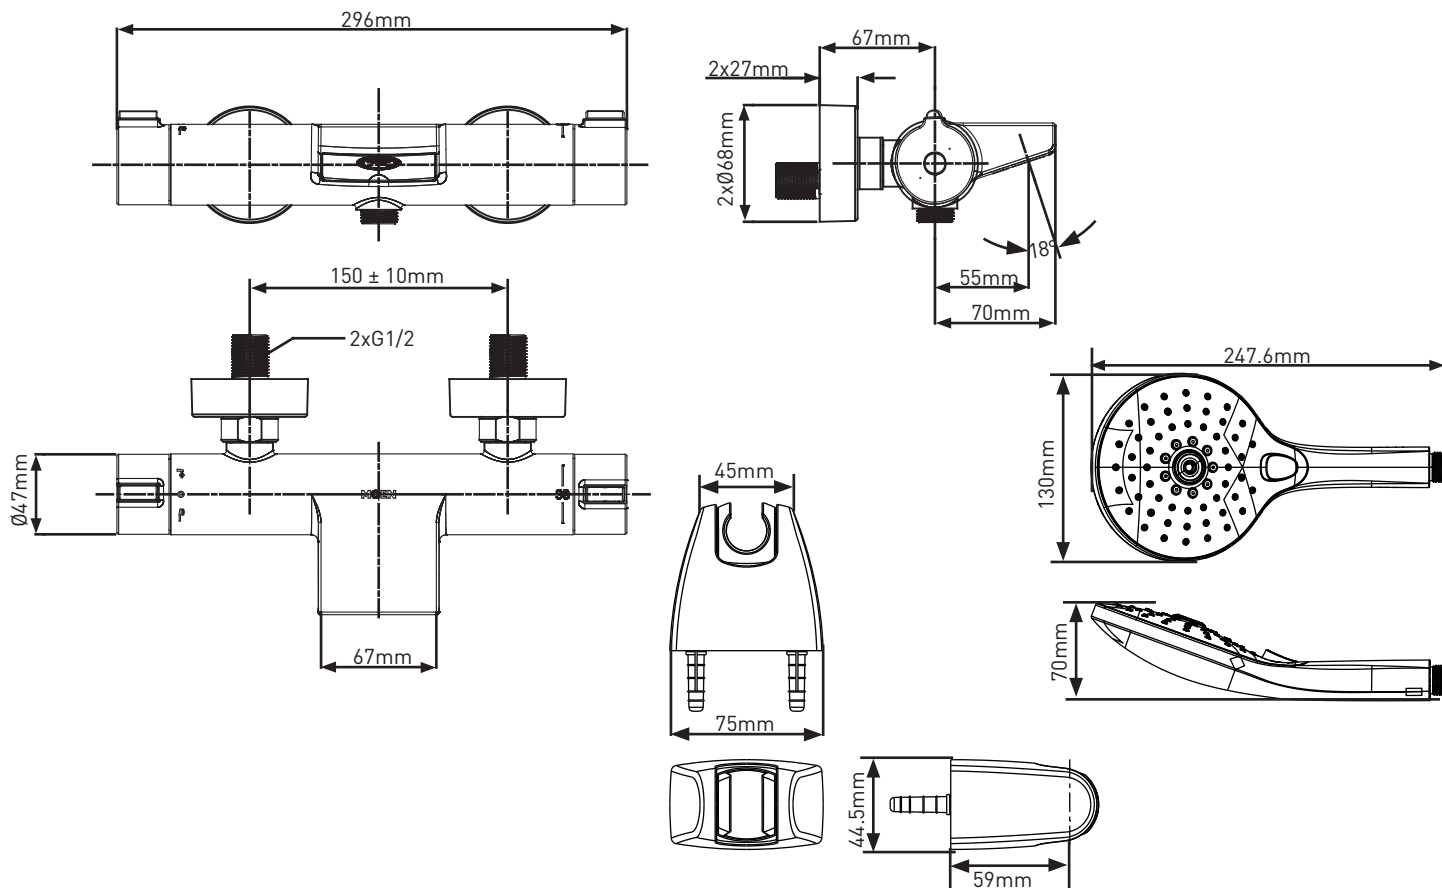

DESCRIPTION

- Product Dimensions: 296 x 137 x 68mm
- Reach Length: 67mm
- Metal construction with various finishes identified by suffixes
- G1/2 connections
- Thermostatic valve design
- Includes 3F hand-held shower and 1500mm shower hose

OPERATION

- Knob Style handle
- Temperature handle operates through a 237° arc with maximum cold at full clockwise rotation and maximum hot at full counterclockwise rotation
- Safety stop preset temperature at 38°C
- Factory established temperature range from 15°C to 49°C

FLOW

- Water flow rate at 0.1Mpa is 6.0L/min minimum in tub spout, about 4.0 L/min to 9.0 L/min with hose and handheld shower.

CARTRIDGE

- Thermostatic cartridge design with Nonmetallic/no-ferrous material


STANDARDS

(Unless otherwise dated, it is considered to be the latest version)

- Conforms to QB/T 2806

WARRANTY

- 5-year limited warranty for cartridge
- 2-year limited warranty for other accessories (Including hose, handle, aerator, etc.)

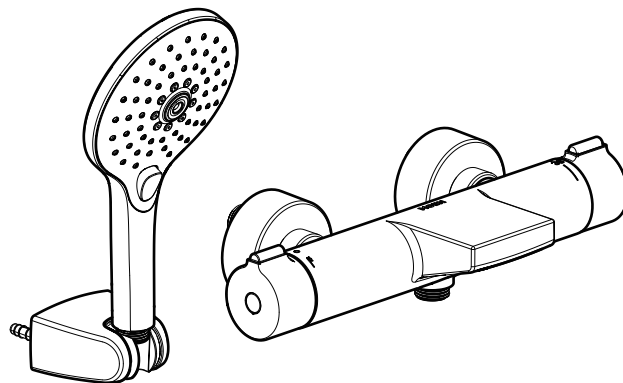

Fascination

Thermostatic Tub Shower Faucet

MODELS: 63332H series

